
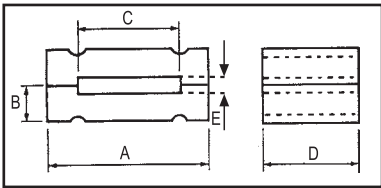


EMV-FLACHBANDKABELFERRIT

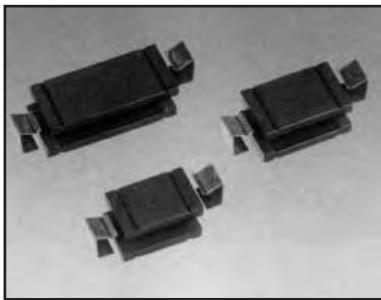

- Die beiden Ferritkernhälften werden mit Hilfe von Metallklammern zusammengehalten. (Im Lieferumfang enthalten.)
- Ausführliche Datenblätter auf Anfrage.

| Art.-Nr. | A | B | C | D | E | Impedanz Ω | |
|-----------|------|------|------|------|-----|-------------------|---------|
| | | | | | | 25 MHz | 100 MHz |
| 601 05 01 | 38.0 | 6.35 | 26.6 | 10.0 | 1.6 | 45 | 107 |
| 601 05 02 | 38.0 | 6.35 | 26.6 | 25.4 | 1.6 | 105 | 175 |
| 601 05 03 | 45.0 | 6.35 | 34.4 | 10.0 | 1.6 | 41 | 98 |
| 601 05 04 | 45.0 | 6.35 | 34.4 | 12.0 | 1.6 | 48 | 150 |
| 601 05 05 | 45.0 | 6.35 | 34.4 | 28.5 | 1.6 | 102 | 189 |
| 601 05 06 | 55.1 | 6.35 | 43.7 | 28.5 | 1.6 | 80 | 181 |
| 601 05 07 | 63.5 | 6.35 | 52.0 | 13.0 | 1.6 | 45 | 114 |
| 601 05 08 | 63.5 | 6.35 | 52.0 | 15.0 | 1.6 | 50 | 124 |
| 601 05 09 | 63.5 | 6.35 | 52.0 | 28.5 | 1.6 | 77 | 172 |
| 601 05 10 | 76.2 | 6.35 | 65.3 | 28.5 | 1.6 | 70 | 200 |
| 601 05 11 | 88.9 | 6.50 | 78.2 | 12.7 | 1.8 | 33 | 95 |

alle Maße in mm

