


0600 Toggle Switches 1A 250Vac



C0600HD --- C0600CC ---

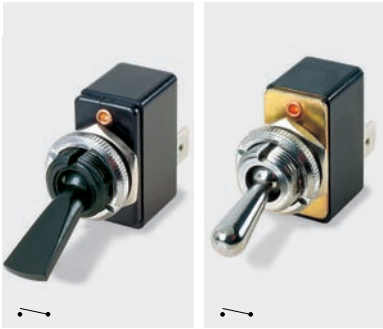


C0602SC ---

- ▶ Toggle switch
- ▶ Brass and nylon actuators
- ▶ Single pole
- ▶ Latching and momentary action
- ▶ Choice of actuator profiles

Approvals and specifications

In house test: 1A 250Vac — Indicative rating only
3A 12/24Vdc — Indicative rating only


3mm contact gap.
Technical data on pages 4 & 5.



▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>0600</p> <p>ON - OFF</p> <p>0602</p> <p>ON - OFF (momentary ON)</p>	<p>C Chromed brass (0600)</p> <p>15.0</p> <p>U Nylon (0600)</p> <p>12.1</p> <p>G Nylon (0600)</p> <p>27.0</p> <p>H Nylon (0600)</p> <p>17.0</p> <p>S Chromed brass stem/nylon paddle (0602 only)</p> <p>41.8</p>	<p>D Nylon neck and top plate (Used with actuator codes U, G and H)</p> <p>C Metal neck and top plate (Used with actuator codes C and S)</p> <p>Panel thickness - 3.5mm Back nut must be fitted</p> <p>Fixing nuts (Standard is M506 & T92)</p> <p>T5 Hex brass</p> <p>15.2</p> <p>M506 Hex nylon</p> <p>3.0 (M506) 2.0 (T5)</p> <p>T92 Knurled brass - slotted</p> <p>16.0</p> <p>M279 Knurled nylon</p> <p>16.2</p>	<p>Cover A0331M0AAA (C Actuator only)</p> <p>Neck Seal A0539M0AAA (C, H & U Actuators) Actuator visible</p> <p>Cover A1080M0AAA (C Actuator only)</p> <p>Covers have internal nylon nuts.</p>

Dimensions (mm)

0600 (U actuator shown)



0602

