

FEATURES

- ✘ Low profile 2.3mm height
- ✘ Gold contact for high reliability
- ✘ Top tape type for washing process


APPLICATION

- ✘ Industrial control
- ✘ Automatic machines control
- ✘ NB, electronic devices

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	600gf max.
Travel	0.6mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C


CIRCUIT

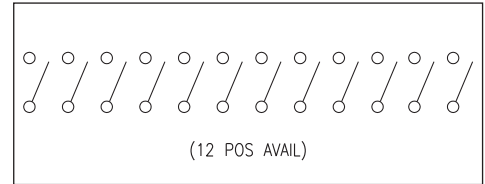

PACKAGE

- <Tube>
27 pcs
- <Tape & Reel>
1000 pcs

HOW TO ORDER

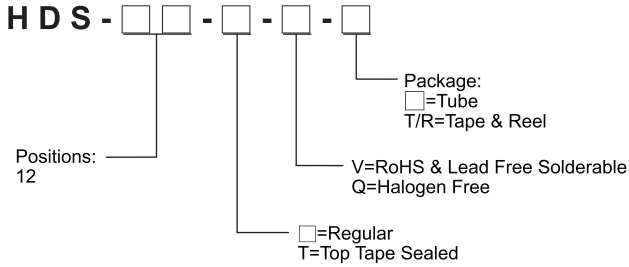

HDS

