

TDS-08

FEATURES

- ✘ 3-state setting


APPLICATION

- ✘ Remote control
- ✘ Home automation
- ✘ Telecommunication

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	1mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C


CIRCUIT

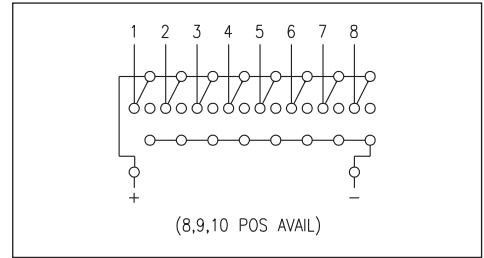


PACKAGE

- <Tube>
 TDS-08: 19 pcs
 TDS-09: 17 pcs
 TDS-10: 16 pcs



HOW TO ORDER

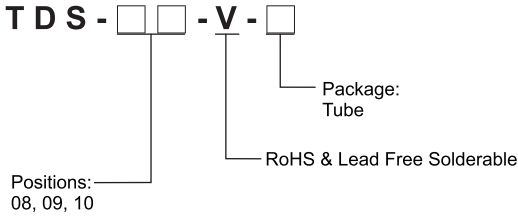

TDS

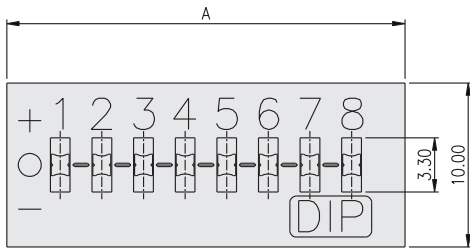

PART NO.	NO.OF POS.	DIM.A	DIM.B
TDS-08	8	24.30	17.78
TDS-09	9	26.84	20.32
TDS-10	10	29.38	22.86

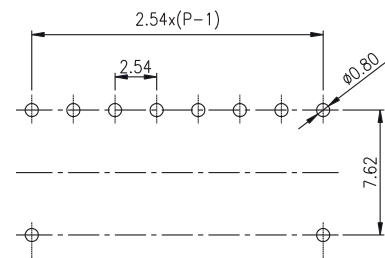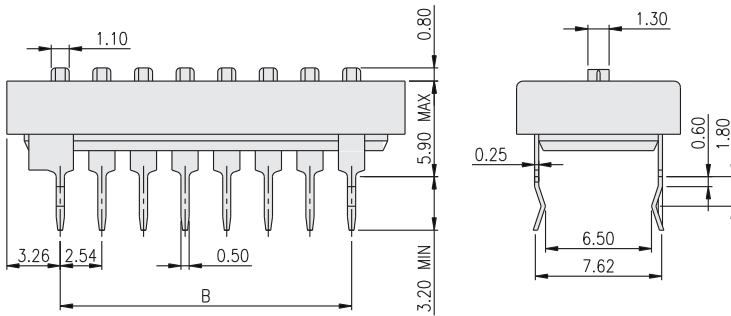

P.C.B. LAYOUT