



High Performance Couplings

- Stainless Steel Bellows
- Nickel Bellows
- Flexible Membrane (Disc)
 - **Torsionally rigid design**
 - **No moving parts**
 - **All-metal construction**
 - **Low inertia**

The operating principles of Flex B, Flex K, Flex Ni and Flex M offer the highest performance available with flexible couplings.

With excellent kinematic properties and torsional stiffness of a very high order, they are suitable for servo drives and satisfy the criteria for highly dynamic position and velocity control systems.

Bellows couplings have the greater torsional stiffness while Flex M have the more tolerant flexural system and feature dynamically balanced construction.



Flexible Membrane Couplings - Rivetted Series

Materials & Finishes

Hubs & spacer: Al. Alloy 2014 T6 or 6026 LF
Clear anodised finish

Membranes: Spring quality stainless steel
Heat treated

Rivet assembly: Brass rivets flanked by formed steel washers
Steel, zinc plate & colour passivate


Fasteners: Alloy steel, black oiled

Temperature Range


-40°F to +248°F (-40°C to +120°C)




Set screw hubs




Ref. 460
for use in pairs or with floating shafts



Ref. 464
for precisely aligned shafts




Ref. 468
for greater radial misalignment and lower bearing loads




Typical


Clamp hubs




Ref. 462
for use in pairs or with floating shafts



Ref. 466
for precisely aligned shafts




Ref. 470
for greater radial misalignment and lower bearing loads



Typical

Drive shafts

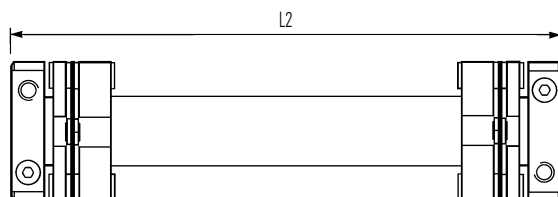

Unless specified otherwise, drive shafts are supplied with set screw hubs inboard.

Drive shafts are supplied to order.

Please specify:

- Coupling size
- Hub style and bore diameter at each end
- Keyway details
- Overall length L2
- Minimum torsional stiffness, if critical
- Quantity

Flexible Membrane Couplings - Rivetted Series

DIMENSIONS & ORDER CODES

Coupling Size	Set Screw Hubs	Clamp Hubs	ØD in. (mm)	L in. (mm)	① L1 in. (mm)	ØB1, ØB2 max in. (mm)	② ØB3 in. (mm)	Fasteners			④ Moment of inertia kgm ² x 10 ⁻⁸	④ Mass kg x 10 ⁻³
								Screw	③ Torque lb-in. (Nm)	Wrench in. (mm)		
COUPLING REF												
19	460.19	—	0.76 (19.2)	0.51 (13.0)	0.22 (5.6)	.25 (6.35)	N/A	M3	8.32 (0.9)	0.06 (1.5)	30	7
	464.19	—		0.77 (19.6)			0.29 (7.3)				50	10
	468.19	—		1.07 (27.3)			N/A				60	12
	—	462.19		0.80 (20.2)	0.36 (9.2)		N/A	M2.5	11.6 (1.3)	0.08 (2)	40	9
	—	466.19		1.06 (26.8)			0.29 (7.3)				60	13
	—	470.19		1.36 (34.5)			0.29 (7.3)				60	14
26	460.26	—	1.00 (25.6)	0.62 (15.8)	0.27 (6.9)	0.39 (10)	N/A	M4	20.0 (2.2)	0.08 (2)	120	15
	464.26	—		0.88 (22.4)			0.43 (11.0)				160	18
	468.26	—		1.19 (30.1)			N/A				200	23
	—	462.26		0.86 (21.8)	0.40 (10.0)		N/A	M2.5	11.6 (1.3)	0.08 (2)	130	16
	—	466.26		1.12 (28.4)			0.43 (11.0)				160	20
	—	470.26		1.42 (36.1)			0.43 (11.0)				210	25
33	460.33	—	1.32 (33.5)	0.89 (22.5)	0.40 (10.0)	0.50 (12.7)	N/A	M5	40.8 (4.6)	0.10 (2.5)	560	37
	464.33	—		1.26 (32.1)			0.56 (14.1)				800	52
	468.33	—		1.69 (42.8)			N/A				830	55
	—	462.33		1.20 (30.5)	0.55 (14.0)		N/A	M3	21.5 (2.4)	0.10 (2.5)	520	37
	—	466.33		1.58 (40.1)			0.56 (14.1)				730	51
	—	470.33		2.00 (50.8)			0.56 (14.1)				760	55
41	460.41	—	1.63 (41.5)	1.10 (27.1)	0.47 (12.0)	0.63 (16)	N/A	M6	67.4 (7.6)	0.12 (3)	1540	69
	464.41	—		1.52 (38.5)			0.69 (17.5)				2250	97
	468.41	—		1.97 (50.1)			N/A				2450	107
	—	462.41		1.46 (37.1)	0.67 (17.0)		N/A	M4	50.1 (5.6)	0.12 (3)	1530	72
	—	466.41		1.91 (48.5)			0.69 (17.5)				2220	100
	—	470.41		2.40 (60.1)			0.69 (17.5)				2370	109

IMPORTANT

Load capacity depends on application conditions: **see page 4** for details

- ① Length of supported thro' bore.
- ② Clearance bore thro' spacer.
- ③ Maximum recommended tightening torque.
- ④ Values apply with max bores.
- ⑤ **Peak torque.** Select a size where Peak Torque exceeds the application torque x service factor. (**see page 4**)
- ⑥ Max. compensation values are mutually exclusive.
- ⑦ Torsional stiffness values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores.
Note that in some vendors' catalogues the given torsional stiffness applies to the membrane stack only, giving rise to a greater value.

PERFORMANCE

Coupling Size	Ref.	⑤ Peak torque lb-in. (Nm)	⑦ Max compensation			⑦ Flexural stiffness			
			Angular deg	Radial in. (mm)	Axial in. (±mm)	Torsional Nm / rad	Angular N / deg	Radial N / mm	Axial N / mm
19	460 & 462	7.97 (0.9)	2	0 (0)	.004 (0.1)	220	0.4	—	—
	464 & 466		4	.001 (0.2)	.001 (0.2)	150	0.25	14	< 7
	468 & 470		4	.016 (0.4)	.001 (0.2)	145	0.3	4	
26	460 & 462	20.4 (2.3)	2	0 (0)	.004 (0.1)	585	0.75	—	—
	464 & 466		4	.001 (0.2)	.001 (0.2)	385	0.5	37	< 7
	468 & 470		4	.016 (0.4)	.001 (0.2)	400	0.4	7	
33	460 & 462	49.6 (5.6)	1.5	0 (0)	.004 (0.1)	1560	2	—	—
	464 & 466		3	.001 (0.2)	.004 (0.1)	935	1	48	< 8
	468 & 470		3	.016 (0.4)	.001 (0.2)	980	1.2	13	
41	460 & 462	100 (11.3)	1	0 (0)	.004 (0.1)	2710	4	—	—
	464 & 466		2	.001 (0.2)	.001 (0.2)	1980	2	100	< 8
	468 & 470		2	.016 (0.4)	.001 (0.2)	2020	2	25	

STANDARD BORES

Sizes indicated in parenthesis are metric (mm).

Coupling Size	ØB1, ØB2 +0.0012/ -0 (+0.03mm/-0mm)																			
	(3)	1/8"	(4)	3/16"	(5)	(6)	1/4"	(8)	(9)	3/8"	(10)	(11)	(12)	1/2"	(14)	(15)	5/8"	(16)		
19	•	•	•	•	•	•	•	•	•	•	•	•	•							
26			•	•	•	•	•	•	•	•	•	•	•							
33						•	•	•	•	•	•	•	•	S	S	S				
41							•	•	•	•	•	•	•	•	S	S	S	S		
Bore ref.	14	16	18	19	20	22	24	28	30	31	32	33	35	36	38	40	41	42		
Corresponding bore adaptor					251		253	255				257		259						260

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See *page 58* for details of metal bore adaptors.
S = Plain bore only, types 462, 466 & 470, keyways not permissible sizes 19 & 26.

Flexible Membrane Couplings - Bolted Series

Materials & Finishes


- Hubs & spacer:** Al. Alloy 2014A T6 or 6026 LF
Clear anodised finish
- Membranes:** Spring quality stainless steel
Heat treated
- Bolt assembly:** Bolt, alloy steel, black oiled finish
Bush assembly, steel, zinc plate & black chromate
Safety washer, carbon steel, black/brown oiled finish
- Fasteners:** Alloy steel, black oiled




Temperature Range

-40°F to + 248°F (-40°C to +120°C)

Set screw hubs

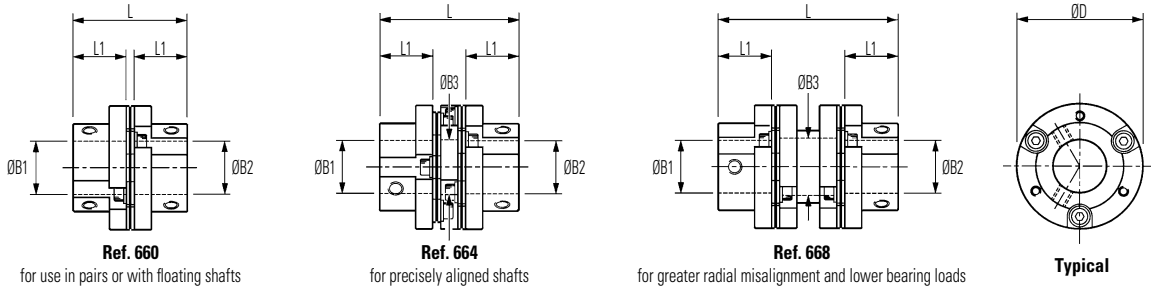


Clamp hubs

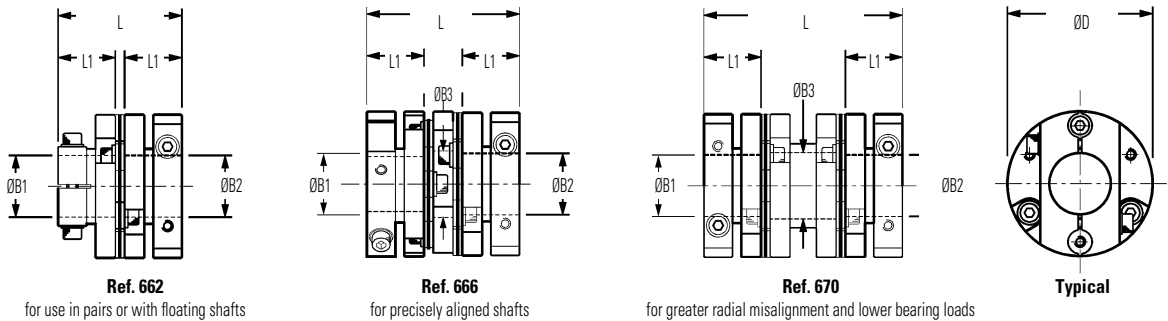

Drive shafts

Unless specified otherwise, drive shafts are supplied with set screw hubs inboard and/or bonded to link shaft.

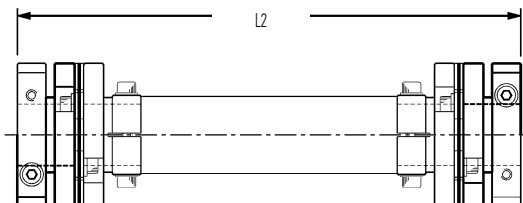

Drive shafts are supplied to order.

Please specify: • Coupling size • Hub style and bore diameter at each end • Keyway details • Overall length L2 • Minimum torsional stiffness, if critical • Quantity

Flexible Membrane Couplings - Bolted Series

DIMENSIONS & ORDER CODES

Coupling Size	Set Screw Hubs	Clamp Hubs	ØD in. (mm)	L in. (mm)	L1 ^① in. (mm)	ØB1, ØB2 max in. (mm)	ØB3 in. (mm)	Fasteners			Moment of inertia ^④ kgm2 x 10-8	Mass ^④ kg x 10-3
								Screw	Torque ^③ lb.-in. (Nm)	Wrench in. (mm)		
COUPLING REF												
41	660.41	—	1.63 (41.5)	1.45 (36.9)	0.67 (17.1)	0.63 (16)	N/A	M6	67.3 (7.6)	0.12 (3)	1160	63
	664.41	—		1.89 (47.9)			0.66 (16.8)				1680	90
	668.41	—		2.35 (59.7)			0.69 (17.5)				1790	101
	—	662.41		1.45 (36.9)			N/A	M4	50.1 (5.6)	0.12 (3)	1400	74
	—	666.41		1.89 (47.9)			0.66 (16.8)				2010	101
	—	670.41		2.35 (59.7)			0.69 (17.5)				2250	112
52	660.52	—	2.05 (52.0)	1.74 (44.2)	0.79 (20.0)	0.79 (20)	N/A	M6	0.86 (7.6)	0.12 (3)	3740	124
	664.52	—		2.17 (55.0)			0.87 (22.0)				5490	168
	668.52	—		2.85 (72.4)			N/A				M5	101 (11.4)
	—	662.52		1.97 (50.0)			N/A	5660	164			
	—	666.52		2.39 (60.8)			0.87 (22.0)	7470	208			
	—	670.52		3.07 (78.1)			0.87 (22.0)	8870	247			
66	660.66	—	2.60 (66.0)	2.38 (60.4)	1.10 (28.0)	1.10 (28)	N/A	M8	162 (18.3)	0.16 (4)	13370	272
	664.66	—		2.90 (73.6)			1.13 (28.7)				18040	360
	668.66	—		3.73 (94.7)			1.19 (30.2)				23400	447
	—	662.66		2.22 (56.4)			N/A	M5	101 (11.4)	0.16 (4)	14200	269
	—	666.66		2.74 (69.6)			1.13 (28.7)				19300	357
	—	670.66		3.57 (90.7)			1.19 (30.2)				24320	444
76	—	662.76	2.99 (76.0)	3.20 (81.2)	1.50 (38.0)	1.50 (38)	N/A	M8	354 (40.0)	0.24 (6)	45658	529
	—	670.76	4.98 (126.4)	3.80 (96.5)	1.54 (39)	1.54 (39)	69823				804	

IMPORTANT

Load capacity depends on application conditions: **see page 4** for details

- ① Length of supported thro' bore.
- ② Clearance bore thro' spacer.
- ③ Maximum recommended tightening torque.
- ④ Values apply with max bores.
- ⑤ **Peak torque.** Select a size where Peak Torque exceeds the application torque x service factor. (**see page 4**)
- ⑥ Max. compensation values are mutually exclusive.
- ⑦ Torsional stiffness values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores.

Note that in some vendors' catalogues the given torsional stiffness applies to the membrane stack only, giving rise to a greater value.

Note that the drawings on the facing page represent Size 66 & 76 which employ 6-bolt membrane Sizes 41 & 52 employ 4-bolts

PERFORMANCE

Coupling Size	Ref.	⑤ Peak torque lb.-in. (Nm)	⑥ Max compensation			⑦ Flexural stiffness			
			Angular deg	Radial in. (mm)	Axial in. (± mm)	Torsional Nm / rad x 10-3	Angular N / deg	Radial N / mm	Axial N / mm
41	660 & 662	100 (11.3)	1	0 (0)	.004 (0.1)	4.0	3.7	—	< 8
	664 & 666		2	.008 (0.2)	.001 (0.2)	2.8	1.6	97	
	668 & 670		2	.016 (0.4)	.001 (0.2)	2.6	1.6	23	
52	660 & 662	265 (30)	1	0 (0)	.004 (0.1)	7.5	10.0	—	< 9
	664 & 666		2	.008 (0.2)	.001 (0.2)	4.8	5.0	313	
	668 & 670		2	.016 (0.4)	.001 (0.2)	4.8	5.0	57	
66	660 & 662	531 (60)	1	0 (0)	.004 (0.1)	19.0	84.0	—	< 9
	664 & 666		2	.008 (0.2)	.001 (0.2)	12.0	23.0	379	
	668 & 670		2	.016 (0.4)	.001 (0.2)	12.0	23.0	93	
76	662	885 (100)	0.5	0 (0)	.004 (0.1)	45.7	178	—	< 9
	670		1	.016 (0.4)	.001 (0.2)	31	134	110	

STANDARD BORES⁸

Sizes indicated in parenthesis are metric (mm).

Coupling Size	ØB1, ØB2 +0.0012/-0 (+0.03mm/-0mm)																			
	1/4"	(8)	(9)	3/8"	(10)	(11)	(12)	1/2"	(14)	(15)	5/8"	(16)	(18)	(19)	3/4"	(20)	(24)	(25)	1"	(28)
41	•	•	•	•	•	•	•	•	S	S	S	S								
52		•	•	•	•	•	•	•	•	•	•	•	S	S	S	S				
66							•	•	•	•	•	•	•	•	•	•	•	•	•	S
76	----- MANUFACTURED TO ORDER ONLY. PLEASE ENQUIRE -----																			
Bore ref.	24	28	30	31	32	33	35	36	38	40	41	42	45	46	47	48	51	52	53	54
Corresponding bore adaptor	253	255			257			259					260			261				

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See *page 58* for details of metal bore adaptors. S = Plain bore only, types 662, 666 & 670.