


FERRITPERLEN


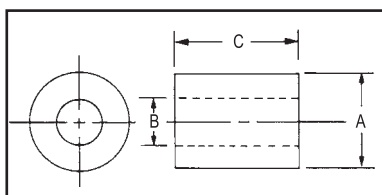


- Ausführung unbedrahtet, lose geschüttet
- Ausführliche Datenblätter auf Anfrage.
- **Bestellnummer = Art.-Nr. + Material**
(Beispiel: 603 01 01 T2)

Art.-Nr.	Material	A	B	C	Impedanz Ω	
					25 MHz	100 MHz
603 01 05	T20	1.6	0.7	3.3	24	28
603 01 15	T3	1.6	0.8	5.0	-	33
603 01 18	T3	2.5	0.8	3.0	20	30
603 01 26	T1	2.5	0.8	4.0	33	52
603 01 30	T3	2.5	1.0	3.0	10	30
603 01 07	T22	2.5	1.2	11.2	55	93
603 01 42	T1	2.5	1.3	2.5	18	43
603 01 08	T20	2.8	1.1	2.9	24	30
603 01 21	T3	2.85	1.6	3.8	18	50
603 01 09	T2	3.0	1.0	3.0	25	47
603 01 01	T2	3.0	1.0	4.0	37	44
603 01 34	T1	3.0	1.2	3.0	23	44
603 01 20	T1	3.0	1.2	6.0	40	58
603 01 36	T1	3.5	0.8	14.0	144	212
603 01 37	T3	3.5	0.9	6.0	50	75
603 01 04	T2	3.5	1.0	3.0	29	38
603 01 11	T21	3.5	1.0	6.0	59	70
603 01 45	T1	3.5	1.0	8.0	78	111
603 01 47	T19	3.5	1.0	14.0	-	180
603 01 03	T2	3.5	1.2	3.5	25	32
603 01 48	T1	3.5	1.2	4.0	31	46
603 01 10	T1	3.5	1.2	5.0	42	60
603 01 49	T1	3.5	1.2	6.0	45	73
603 01 02	T2	3.5	1.2	7.0	54	84
603 01 16	T3	3.5	1.3	3.0	10	20
603 01 22	T3	3.5	1.3	5.0	37	61
603 01 19	T1	3.5	1.3	6.0	42	68
603 01 50	T1	3.5	1.3	9.0	62	80
603 01 51	T3	3.5	1.5	5.0	20	45
603 01 52	T1	3.5	1.5	6.0	35	60
603 01 53	T1	3.5	1.8	5.0	27	48
603 01 12	T2	3.7	1.4	5.1	38	49
603 01 55	T3	3.8	0.8	8.3	-	100
603 01 13	T20	4.0	1.2	15.0	138	172
603 01 39	T2	4.0	1.5	10.0	84	100
603 01 82	T1	4.0	2.0	2.0	14	37
603 01 59	T1	4.0	2.0	4.0	24	48
603 01 60	T1	4.0	2.0	5.0	28	51
603 01 61	T1	4.0	2.0	7.0	40	64
603 01 24	T2	4.0	2.0	10.0	53	80
603 01 29	T30	4.0	2.0	15.0	50	80
603 01 31	T2	4.0	2.0	25.0	90	120
603 01 25	T3	4.0	2.2	6.0	20	40

alle Maße in mm

FERRITPERLEN

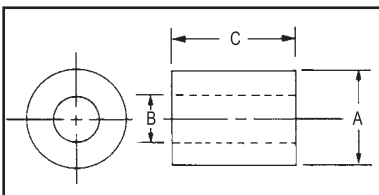

Art.-Nr.	Material	A	B	C	Impedanz Ω	
					25 MHz	100 MHz
603 01 62	T3	4.0	2.2	25.0	90	120
603 01 63	T3	4.1	0.8	6.0	90	-
603 01 28	T2	4.1	2.0	6.0	20	30
603 01 64	T4	4.2	2.0	15.0	45	90
603 01 66	T30	4.5	1.5	7.0	40	80
603 01 67	T3	4.5	2.5	7.0	35	65
603 01 68	T1	4.5	2.6	12.0	49	72
603 01 71	T1	4.83	2.29	6.35	43	80
603 01 72	T2	4.9	2.0	36.0	140	200
603 01 73	T1	5.0	1.5	11.0	93	150
603 01 74	T1	5.0	2.15	18.0	128	147
603 01 75	T1	5.0	2.3	5.0	30	55
603 01 14	T2	5.0	2.5	6.0	34	43
603 01 77	T3	5.08	2.29	10.0	40	65
603 01 17	T3	5.1	2.36	6.4	35	55
603 01 43	T2	6.0	2.0	20.0	52	90
603 01 41	T2	6.0	2.0	25.0	216	251
603 01 83	T1	6.0	3.0	2.0	15	35
603 01 44	T1	6.0	3.0	10.0	52	90
603 01 80	T1	6.0	3.15	18.0	100	155
603 01 81	T3	6.0	3.2	10.0	-	50

alle Maße in mm