


FERRIT-RINGKERNE (NiZn)

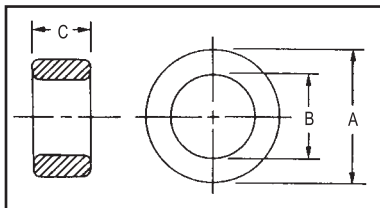

• Andere Abmessungen und Materialien auf Anfrage.

Art.-Nr.	A	B	C	Material	Impedanz Ω	
					25 MHz	100 MHz
600 05 070	7.52	2.39	7.54	T2	60	75
600 05 071	7.62	3.18	4.78	T2	25	50
600 05 07	7.3	3.3	4.3	T1	30	48
600 05 09	9.0	4.9	8.0	T1	38	64
600 05 091	9.0	5.0	3.0	T1	16	45
600 05 10	10.0	5.0	5.0	T1/T2	55	98
600 05 11	11.0	5.0	9.0	T1	60	107
600 05 093	9.65	5.02	4.83	T2	10	30
600 05 092	9.5	5.1	10.0	T1	48	74
600 05 100	10.0	6.0	6.2	T1	25	49
600 05 131	13.0	7.0	5.0	T3	33	62
600 05 132	13.0	7.0	8.0	T2	40	75
600 05 13	13.0	7.0	12.7	T1	60	106
600 05 06	13.0	7.1	6.3	T2	31	43
600 05 124	12.7	7.9	6.35	T3	39	68
600 05 12	12.5	8.0	12.0	T1	42	72
600 05 141	14.0	8.0	7.0	T2	28	50
600 05 160	16.0	8.0	13.0	T3	64	118
600 05 16	16.3	8.2	13.0	T1	70	125
600 05 17	16.3	8.2	16.0	T1	83	140
600 05 175	17.5	9.5	12.7	T1	59	95
600 05 05	16.0	10.0	7.0	T1	29	41
600 05 04	16.0	10.0	10.0	T1	43	85
600 05 18	18.0	10.0	6.0	T1	36	66
600 05 182	18.0	10.0	10.0	T3	30	80
600 05 14	14.5	10.2	8.0	T1	36	91
600 05 20	20.4	10.2	5.0	T1	29	43
600 05 21	20.5	10.25	10.0	T1	53	86
600 05 19	15.0	10.5	12.0	T1	37	62
600 05 23	23.0	11.0	14.0	T1	80	133
600 05 161	16.0	12.0	8.0	T3/T7	74	99
600 05 23T	23.5	12.6	14.0	T1	71	125
600 05 24	21.2	12.7	6.0	T1	33	52
600 05 26	21.0	13.2	12.0	T3	30	65
600 05 27	23.0	13.8	6.7	T3	15	45
600 05 22	22.0	14.0	8.0	T3	30	60
600 05 251	25.0	15.0	8.0	T1	38	81
600 05 25	25.0	15.0	12.0	T1	54	102
600 05 28	28.0	16.0	13.0	T3	58	114
600 05 29	28.0	16.0	20.0	T3	99	186
600 05 30	29.0	19.0	7.5	T3	46	96
600 05 32	31.0	19.0	16.0	T1	78	163
600 05 311	31.7	19.0	13.0	T3	64	132
600 05 31	31.7	19.3	8.0	T1	34	55
600 05 37	35.6	23.0	12.7	T3	25	90
600 05 36	36.0	23.0	15.0	T1	39	112
600 05 38	35.6	25.4	7.5	T3	34	114
600 05 40	40.6	27.2	15.0	T1	55	98
600 05 46	46.0	31.0	12.0	T1	53	108
600 05 61	61.4	36.0	12.8	T1	58	104

Artikel sortiert nach Innendurchmesser (B)

alle Maße in mm