




SMD-FERRITE TYP TE-FC

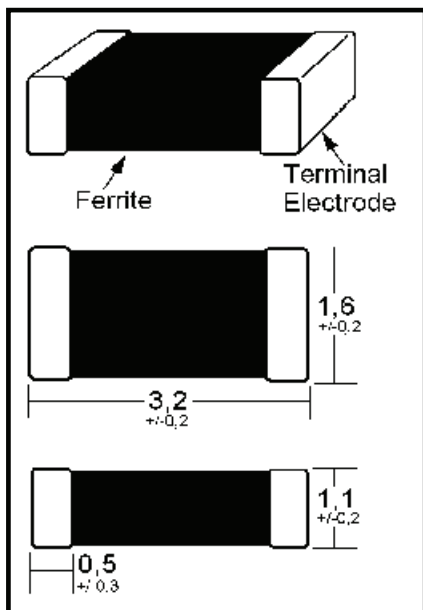

• Bauform 1206 / Größe 3216

Art.-Nr.	Impedance Ω (+/-25%) bei 100 MHz	Impedance max. (Ω /MHz)	Rated Current (mA) max.	DCR Ω max.
640 53 260	26	57 / 1000	500	0,20
643 53 300	30	55 / 1000	3000	0,04
640 53 310	31	64 / 1000	500	0,20
640 53 420	42	78 / 1000	500	0,20
640 53 500	50	88 / 1000	500	0,20
643 53 500	50	87 / 900	3000	0,04
640 53 700	70	118 / 610	500	0,20
643 53 800	80	154 / 1000	3000	0,04
640 53 900	90	139 / 540	500	0,20
641 55 121	120	148 / 304	300	0,15
641 57 121	120	386 / 276	700	0,25
641 53 121	120	175 / 360	900	0,15
643 53 121	120	209 / 400	2000	0,10
641 55 151	150	172 / 260	300	0,20
641 57 151	150	500 / 235	700	0,25
641 53 151	150	180 / 303	900	0,15
643 53 151	150	200 / 335	2000	0,10
641 55 221	220	235 / 175	250	0,30
641 57 221	220	595 / 248	600	0,30
641 53 221	220	270 / 170	700	0,35
641 55 301	300	320 / 130	200	0,35
641 57 301	300	560 / 220	600	0,35
641 53 301	300	330 / 160	700	0,35
643 53 301	300	335 / 162	1000	0,20
641 55 471	470	476 / 109	200	0,40
641 53 471	470	470 / 100	400	0,35
641 57 471	470	1550 / 162	550	0,40
643 53 471	470	475 / 108	1000	0,20
643 53 501	500	503 / 110	3000	0,04
641 55 601	600	610 / 85	200	0,45
641 53 601	600	630 / 100	400	0,40
641 57 601	600	1700 / 163	500	0,50
643 53 601	600	630 / 110	2000	0,10
641 53 801	800	880 / 95	300	0,60
641 57 801	800	2480 / 146	400	0,50
641 53 102	1000	1100 / 70	300	0,60
641 57 102	1000	2850 / 133	300	0,55
641 51 152	1500 / 50	1700 / 55	300	0,70
641 51 202	2000 / 30	2015 / 35	300	0,70

