SmartThru™ cable entry

SmartThru™ frame, IP66, size 10, with 6 grommet fields

B2 = 83
H2 = 32
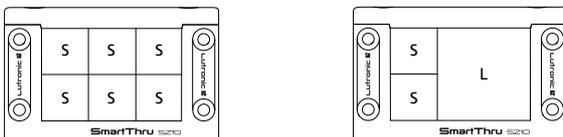H1 = 61
B1 = 96.5
20
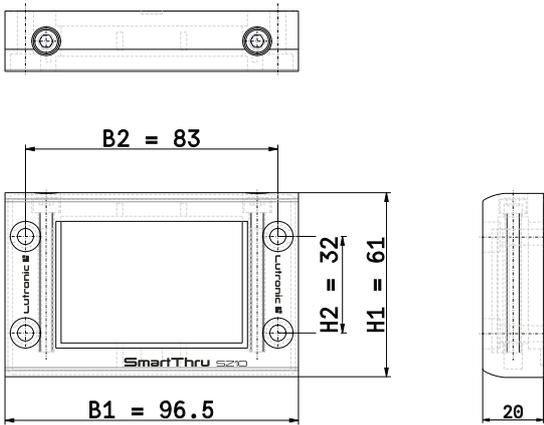
Cutout dimensions

83
65
32
36 – 46
Ø5.5
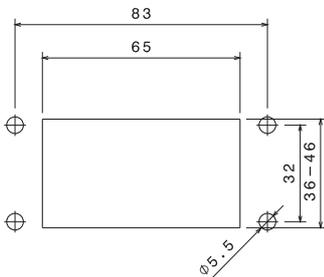
Insertion patterns (examples)

Environmental conditions

Temperature range	-40 °C/+100 °C

Materials

Frame	PA

Mechanical data

Protection class	IP66

Associated products

Accessories
7901   7902   7903

Harnessing equipment
9979 AB   9979 T

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
7900 SZ10	-	10	10

Packaging:
in a cardboard box