







OBO Pro.2®	SPECIFICATIONS	MODEL NO. OBO-40AL1
	PART NAME SMD-Electromagnetic Transducer	SHEET 1 OF 9

ALTERNATION HISTORY							
Marking	Date	ECN NO.	REV.	Description	Page	PREPARE BY	APPROVE BY
※1	MAR,12'07	0703004	D	Conformity RoHS Directive (2002/95/EC) Requests.	10	MIA	蕭可致
※2	AUG,10'09	DG0910015	E	Increase the Hole	9	王志偉	謝明福
※3	NOV.12,09	DG0911013	F	Change the OBO-40AP1 position of the front cover	9		

REV.	DATE	PREPARED BY	CHECKED BY	APPROVED BY
F	NOV.12,2009			

OBO Pro.2®**SPECIFICATIONS****MODEL NO.**
OBO-40AL1**PART NAME**
SMD-Electromagnetic Transducer**SHEET**
2 OF 9**MODEL NO : OBO-40AL1****Features : Conformity RoHS Directive (2002/95/EC) Requests. ※1****1、General Specifications :**

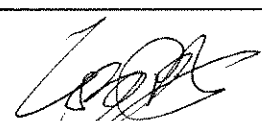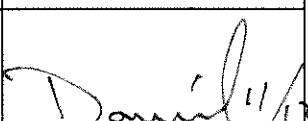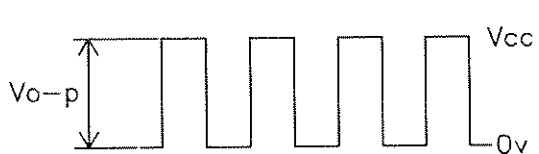	Items	Specification	Conditions
1.1	Rated Voltage	3.0 Vo-p	 <p>Squarewave 1/2 Duty</p>
1.2	Operating Voltage	2-4 Vo-p	
1.3	Resonant Frequency	2300Hz	
1.4	Sound Pressure Level	min. 87dB	Standard State, Standard Drive circuit, Rated Voltage, Distance at 0.1m (A-weight) 2300Hz Squarewave 1/2 Duty.
1.5	Average Current Consumption	max. 80mA	
1.6	Coil Resistance	16±3Ω	
1.7	Operating Temp. Range	-30°C ~ +70°C	SPL ≥ 80dB at "1.4"
1.8	Storage Temp. Range	-40°C ~ +85°C	
1.9	Housing Material	LCP	
1.10	Weight	0.6g	

OBO Pro.2**SPECIFICATIONS**MODEL NO.
OBO-40AL1PART NAME
SMD-Electromagnetic TransducerSHEET
3 OF 9**2 - Standard test Conditions :**



2.1 Standard State	Ordinary Temperature	15°C to 35°C
	Ordinary Humidity	25% to 85%
	Ordinary air pressure	860 to 1060hPa

In case of doubtful judgment, the test is re-performed under Basic State.

2.2 Basic State	Temperature	20±2°C
	Humidity	60% to 70%
	Ordinary air pressure	860 to 1060hPa

3 - Test method :**3.1 Standard Drive Circuit**


Signal amplitude should be large enough to saturate the transistor which drives the buzzer.

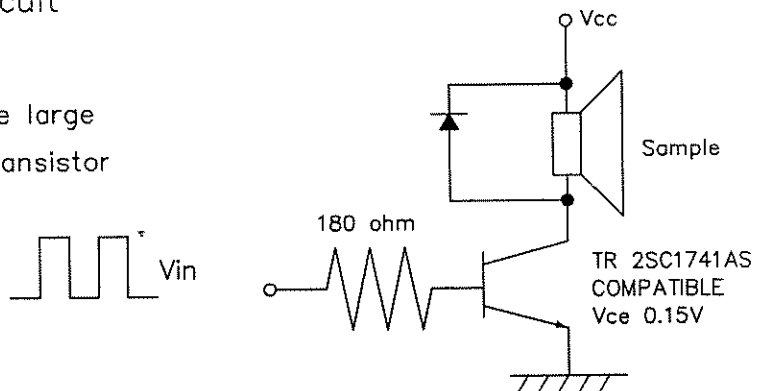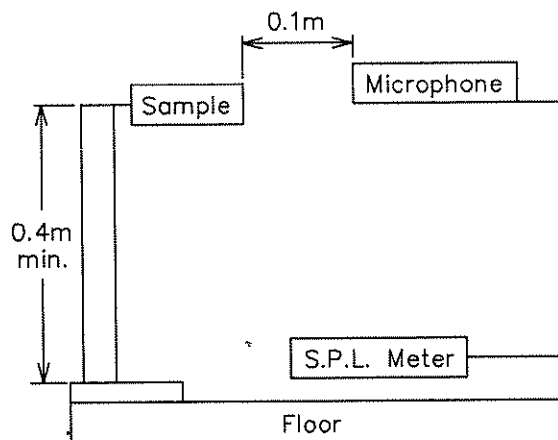**3.2 Standard Test Fixture**

OBO Pro.2**SPECIFICATIONS****MODEL NO.**
OBO-40AL1**PART NAME**
SMD-Electromagnetic Transducer**SHEET**
4 OF 9**4 - Soldering Condition :**

4.1 Reflow Soldering ※1

Recommendable reflow soldering condition is as follows.

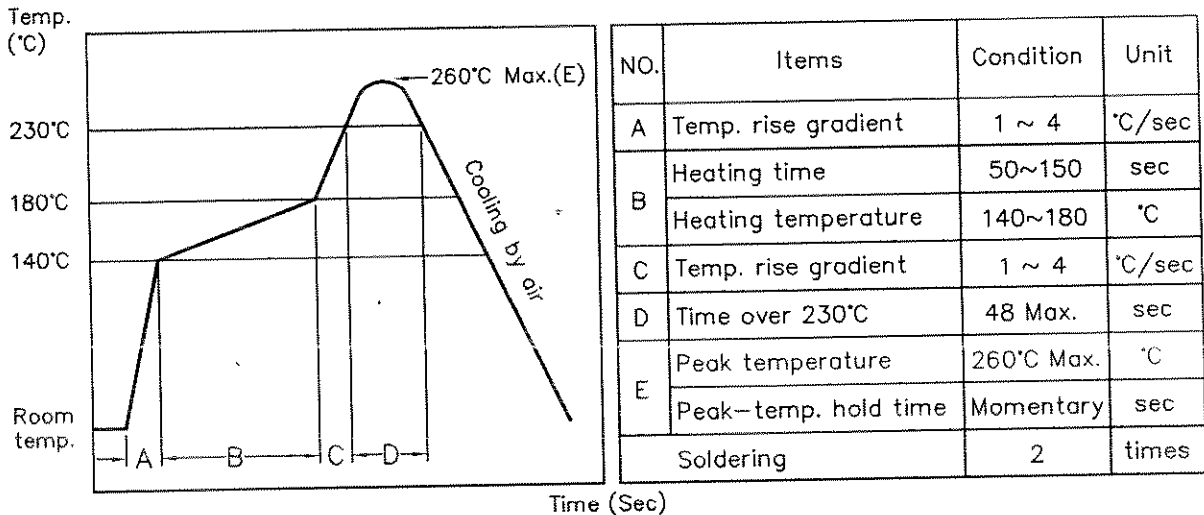


Note :

It is requested that second reflow soldering should be executed after heat of product goes down to normal temperature.

4.2 Hand Soldering ※1

Soldering iron temperature 380°C less than 3 second.


4.3 Soldering Pattern

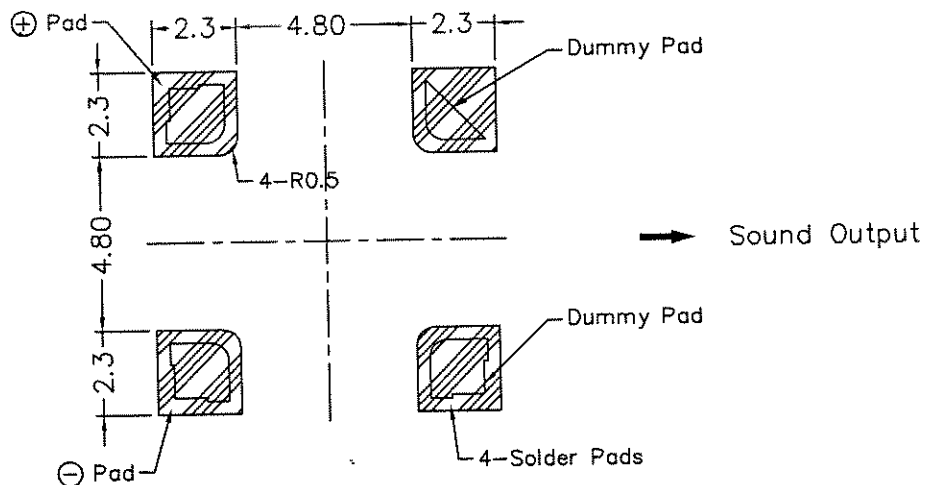

5 - Mechanical Layout and Dimensions :

5.1 Dimensions

Tolerance: $\pm 0.2\text{mm}$ Unit: mm

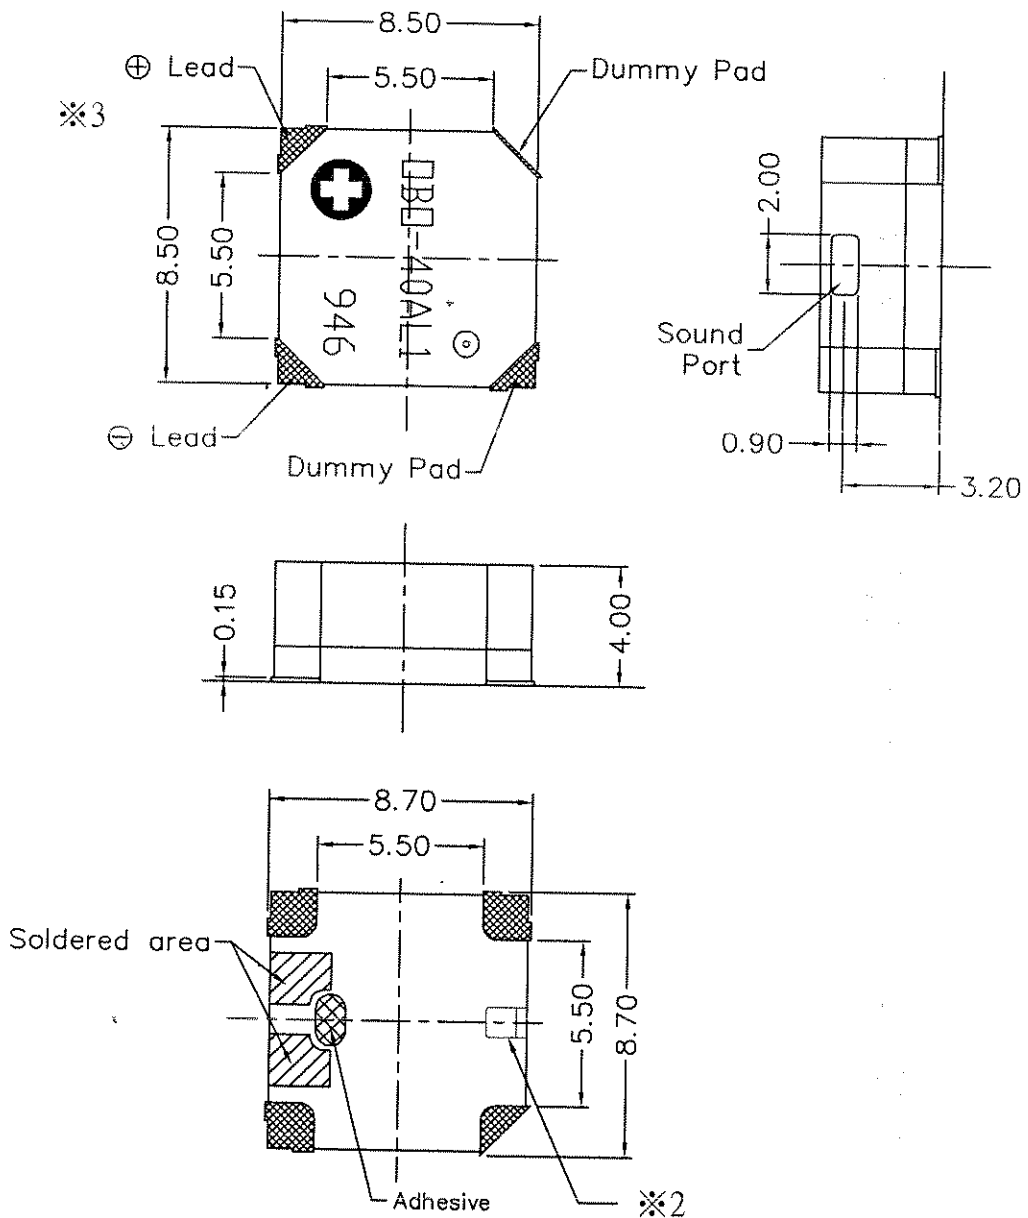

Note : Meaning of Stamp Mark

946 : Production Lot No.

9 : Year 2009 (last 1 figures of the year)

01 : week (01 ~55)

OBO-40AL1 : Model No.

(+) : Polarity identification mark

OBO Pro.2



SPECIFICATIONS

MODEL NO.
OBO-40AL1


PART NAME
SMD-Electromagnetic Transducer

SHEET
6 OF 9

6. Packing Information :

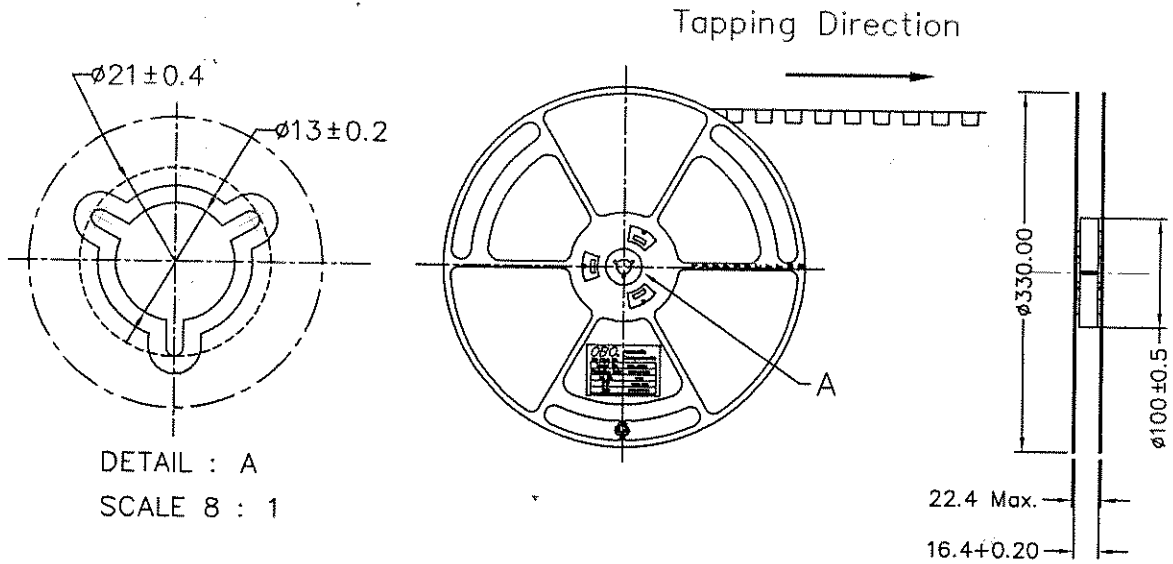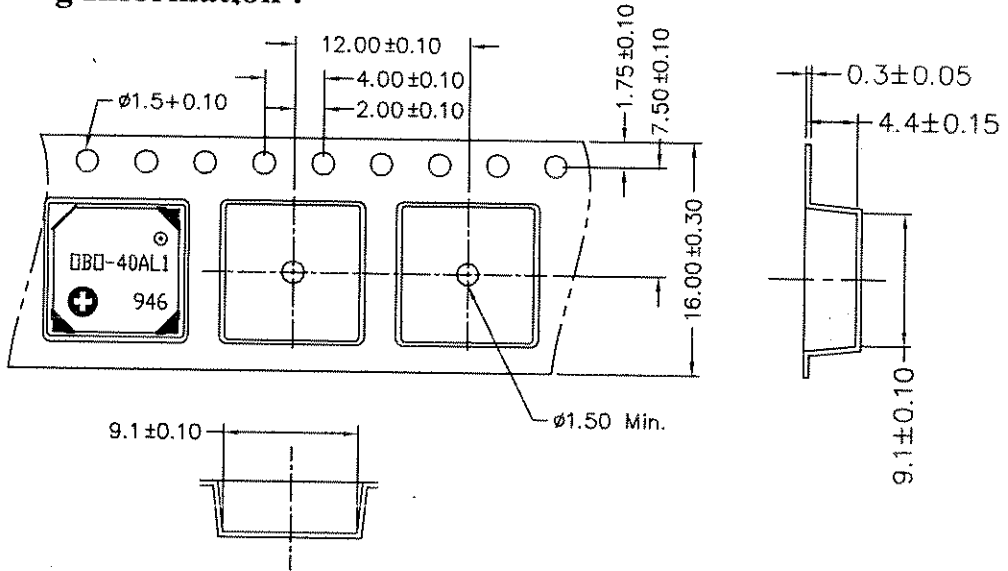

DETAIL : A
SCALE 8 : 1

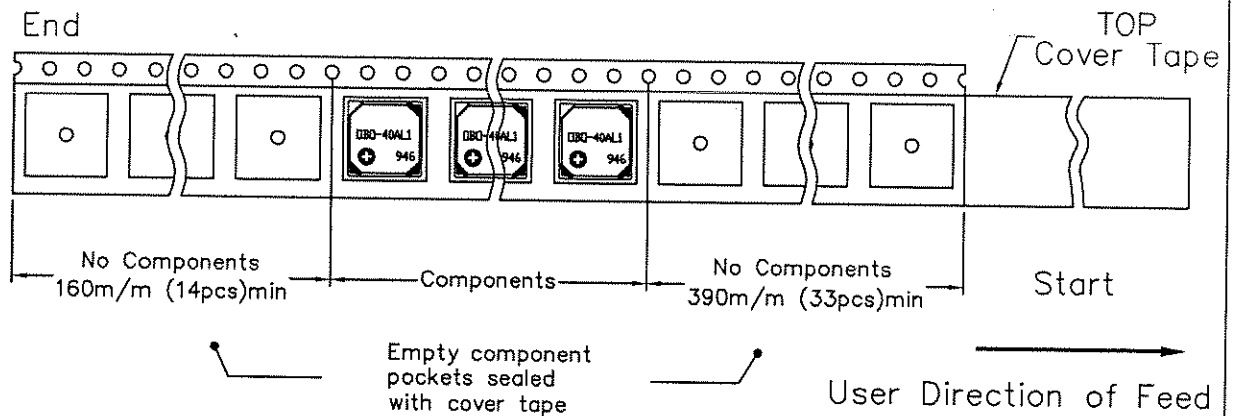

OBO Pro.2

SPECIFICATIONS


MODEL NO.
OBO-40AL1

PART NAME
SMD-Electromagnetic Transducer



SHEET
7 OF 9

Label content


OBO Acoustic Components OBO PRO.2 INC.	
Model No.	OBO-40AL1
Production Order	*****
Lot NO.	***
Q'TY	1000 pcs
Date	*****

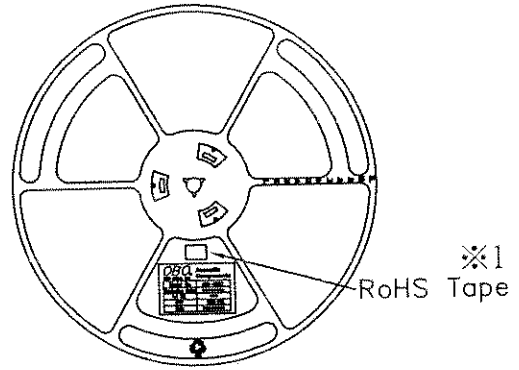

Inside box

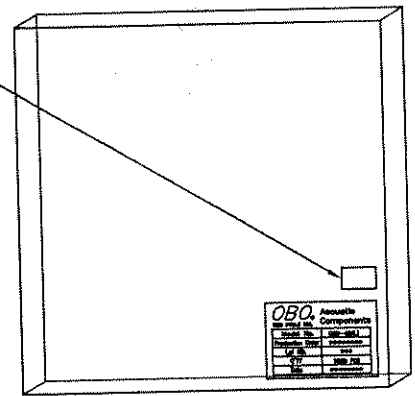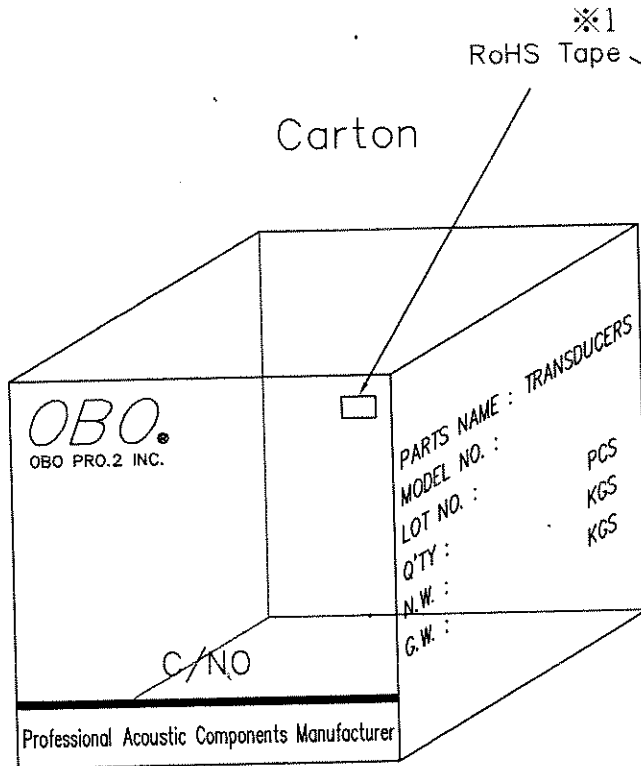


1 Reel / Inside box
(33.3*2.4*33.5)

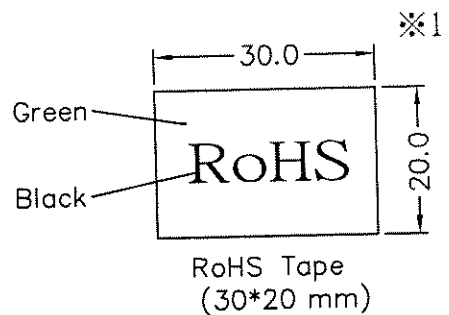

10 Inside box (10000pcs)
/ Carton (34.5*26.5*35.3)

7 · Reliability test :

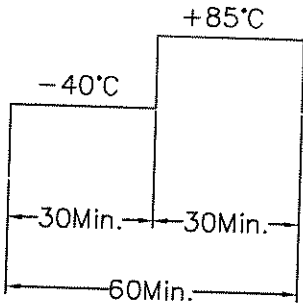NO.	Items	Test Conditions	Evaluation Criteria
1	High Temp. Storage	The part shall be capable of withstanding a storage temperature of +85°C for 240 hours.	After the test the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall be 80dB or more.
2	Low Temp. Storage	The part shall be capable of withstanding a storage temperature of -40°C for 240 hours.	
3	Thermal Shock	The part shall be subjected to 50 cycle. One cycle shall consist of : transfer time : 10 minutes 	
4	Humidity Test	The part shall be subjected to +60°C, 90% RH for 240 hours, and expose to room temperature for 6 hours.	
5	Vibration	10 - 55 - 10Hz, Sinewave Sweep 15 min. X,Y,Z 3 Direction 2 hours each, Total 6 hours.	
6	Drop test	Drop on hard wood board of 5cm. thick, any direction, 10 times, at the height of 150cm	

OBO Pro.2**SPECIFICATIONS****MODEL NO.**
OBO-40AL1**PART NAME**
SMD-Electromagnetic Transducer**SHEET**
9 OF 9

NO.	Items	Test Conditions	Evaluation Criteria
7	Ordinary Temp. life	The part shall be subjected to 240 hours at $25 \pm 10^\circ\text{C}$. Input 3.0Vp-p Squarewave 1/2duty 2300Hz	
8	High Temp. life	The part shall be subjected to 240 hours at $+70^\circ\text{C}$. Input 3.0Vp-p Squarewave 1/2duty 2300Hz	
9	Low Temp. life	The part shall be subjected to 240 hours at -30°C . Input 3.0Vp-p Squarewave 1/2duty 2300Hz	
10	※1 Reflow	<p>Temp. ($^\circ\text{C}$)</p> <p>230$^\circ\text{C}$</p> <p>180$^\circ\text{C}$</p> <p>140$^\circ\text{C}$</p> <p>Room temp.</p> <p>260$^\circ\text{C}$ Max.(E)</p> <p>Cooling by air</p> <p>Time (Sec)</p> <p>A B C D</p>	<p>a. No abnormality should be found after the test</p> <p>b. Good soldering to meet soldering requirements</p>

Notes :

As this product is not protected from foreign material entering, please make sure that that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enter it.