

No. 224-9, LANE 105, YUNG-FENG ROAD, PA-TE CITY, TAoyUAN, TAIWAN, R.O.C.
 TEL:886-3-361-4436 FAX:886-3-361-4437
 E-MAIL:obogobo.com.tw Website:www.obo.com.tw

SPECIFICATION

1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. MODEL NO. : OBO-TE20265-16


3. SPECIFICATION(at 25 °c)

- 3.1 Resonant Frequency : 6.5 ± 0.5 kHz
 3.2 Resonant Resistance : 350 OHM max.
 3.3 Capacitance : 12,000pF ± 30% at 120Hz
 3.4 Input Voltage : 30Vp-p max
 3.5 Operating Temperature : -20°C to +60°C
 3.6 Storage Temperature : -20°C to +70°C
 3.7 Dimension : as per Figure 1.

① Piezoelectric Ceramics

② Brass Plate

Figure 1. Unit :m.m

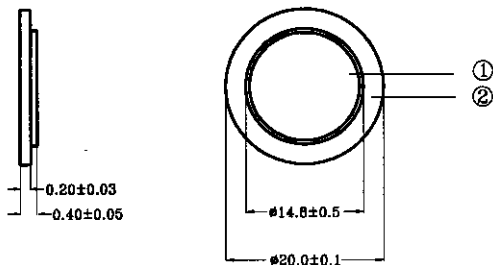

Drawing by	Checked by	Approved by	DWG. NO.
張仁興	張仁興	張仁興	STE096-C