

OBO PRO.2 INC.

文件發行章

No. 224-9, LANE 105, YUNG-FENG ROAD, PA-TE CITY, TAOYUAN, TAIWAN, R.O.C.

TEL:886-3-361-4436 FAX:886-3-361-4437

E-MAIL:obo@obo.com.tw Website:www.obo.com.tw

SPECIFICATION

1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. MODEL NO. : OBO-TE27340-16


3. SPECIFICATION(at 25 °c)

- 3.1 Resonant Frequency : 4.0 ± 0.5 KHz
3.2 Resonant Resistance : 500 OHM max.
3.3 Capacitance : $17,000\text{pF} \pm 30\%$ at 120Hz
3.4 Input Voltage : 30Vp-p max.
3.5 Operating Temperature : -20°C to $+60^{\circ}\text{C}$
3.6 Storage Temperature : -20°C to $+70^{\circ}\text{C}$
3.7 Dimension : as per Figure 1.

① Piezoelectric Ceramics

② Brass Plate

Figure 1. Unit :m.m

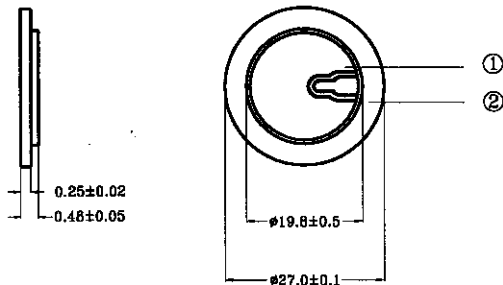

Drawing by

林仲祥 5/14

Checked by

陸弘
魏五洲
高仁豐

Approved by

陸弘
魏五洲
高仁豐

DWG. NO.

STE074-C