

## IP67 SEALED USB-C PANEL MOUNT



### BCU/BPCU/BRU SERIES

**BCU**  
Mates with:  
BPCU, BRU


**BPCU**  
Mates with:  
BCU

**BRU**  
Mates with:  
BCU

BCU	END 1	PLATING OPTION	ASSEMBLED LENGTH	END 2 OPTION	STYLE
	<b>-C</b> = Sealed Type C Plug	<b>-S</b> = 30 μ" (0.76 μm) Gold	<b>-0.50</b> = .5 meter <b>-1.00</b> = 1 meter <b>-3.00</b> = 3 meters	<b>-UC</b> = Unsealed Type C Plug <b>-SC</b> = Sealed Type C Plug <b>-BC</b> = Blunt Cut	<b>-P</b> = Plastic
Standard Lengths					

### SPECIFICATIONS

- Overmold & Inner Mold:** PVC, Black (BCU)
- Lock Nut:** Thermoplastic, Black (BCU)
- Rubber Pad:** Silicone, Black (BCU)
- Housing Material:** Thermoplastic, Black (BPCU)
- Gasket Material:** Silicone, Black (BPCU)
- Hex Nut:** Thermoplastic, Black (BPCU)

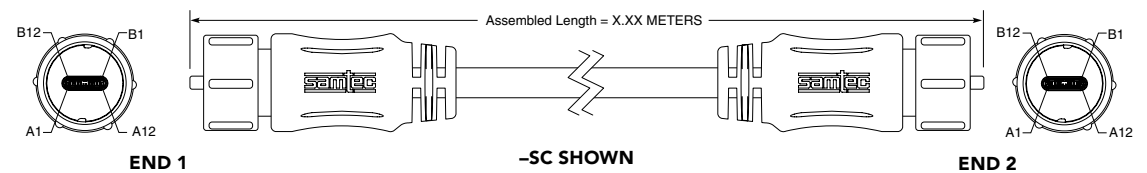

BPCU	END 1	PLATING OPTION	ASSEMBLED LENGTH	END 2 OPTION	STYLE
	<b>-C</b> = Sealed Type C Receptacle	<b>-S</b> = 30 μ" (0.76 μm) Gold	<b>-0.25</b> = .25 meter <b>-0.50</b> = .5 meter <b>-0.75</b> = .75 meter <b>-1.00</b> = 1 meter	<b>-UC</b> = Unsealed Type C Plug <b>-BC</b> = Blunt Cut	<b>-P</b> = Plastic
Standard Lengths					

**PANEL OPENING**

**DUST CAP**  
DCA-BRU-C-01

BRU	C	PLATING OPTION	LEAD STYLE	STYLE
		<b>-S</b> = 30 μ" (0.76 μm) Gold	<b>-VT</b> = Vertical <b>-RA</b> = Right-angle	<b>-P</b> = Plastic

**Note:**  
Some lengths, styles and options are non-standard, non-returnable

[samtec.com?BCU](http://samtec.com?BCU), [samtec.com?BPCU](http://samtec.com?BPCU) or [samtec.com?BRU](http://samtec.com?BRU)

F-221 (Rev 28OCT22)

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.