

## MAXIMUM INSERTION LOSS @ T=25°C1

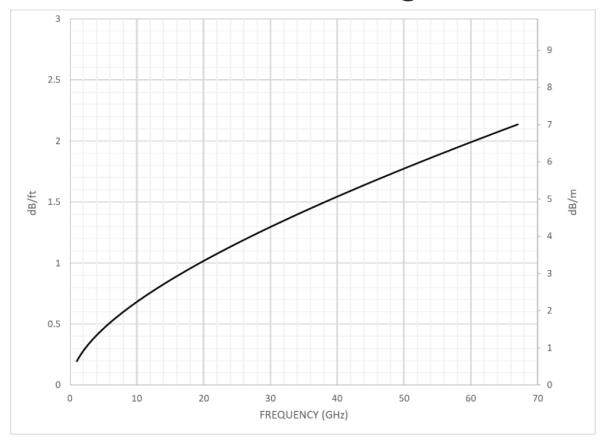

 $^{1}$ Not including connector losses. Connector losses can be approximated as  $0.045x\sqrt{F(GHz)}$  dB/connector.

## TYPICAL POWER HANDLING @ T=25°C2

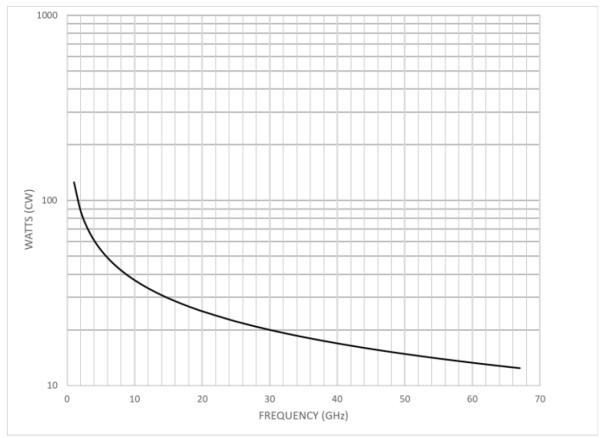

<sup>2</sup>Guideline, only. Actual power handling performance depends on mounting and cooling.