

## MAXIMUM INSERTION LOSS @ T=25°C1

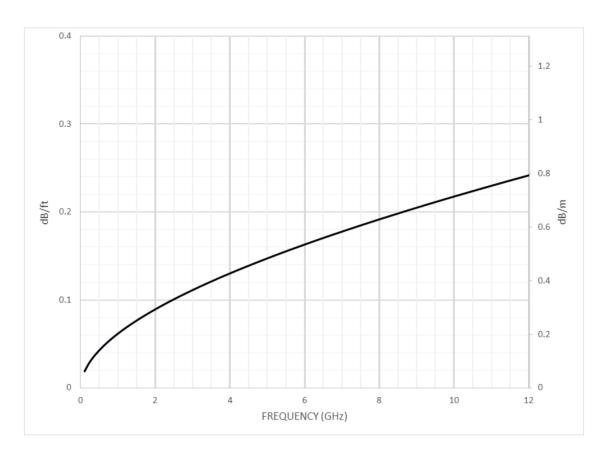

 $^1\text{Not\,including\,connector\,losses}.$  Connector losses can be approximated as 0.045x $\sqrt{F(\text{GHz})}$  dB/connector.

## TYPICAL POWER HANDLING @ T=25°C<sup>2</sup>

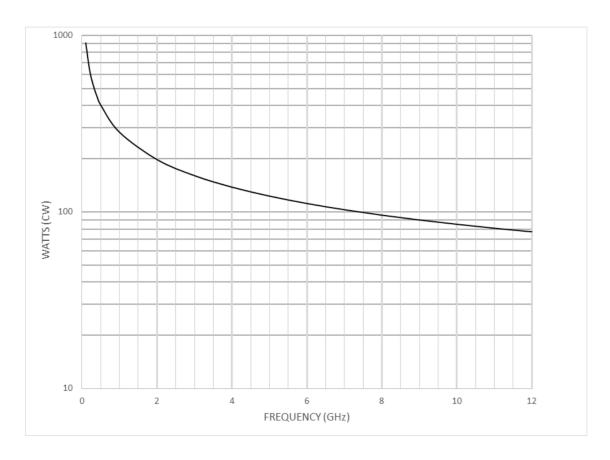

 $^2$ Guideline, only. Actual power handling performance depends on mounting and cooling.