


Flexiprint IP20

5060 PLCC6, RGB, high bright

FP1-F02D-500

Specifications

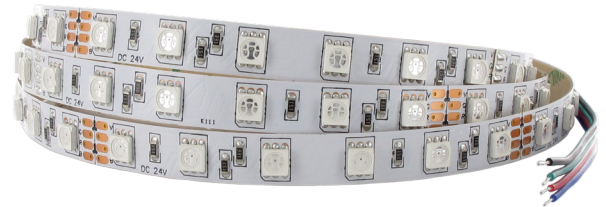


Voltage	24V
Current	3 x 1A
Wattage	14.4W/m (3 x 4.8W/m)
Number of LEDs	300pcs
Length of stripe	5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	




Benefits

Adhesive tape on backside
Cutttable every ~100mm


Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength	Intensity lm/m
FP1-F02D-500	 red	620nm	115
	 green	520nm	245
	 blue	470nm	51

Dimensions

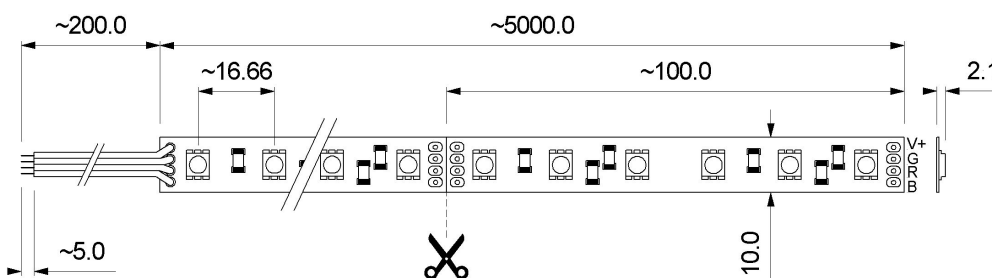

Additional

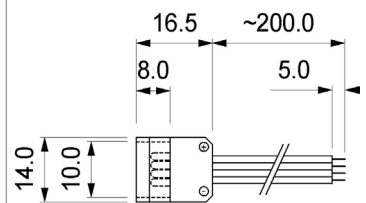

Quick connector for a solderless connection with the LED stripe.
Part-no.: SLO-C310-00005
(details on page 36)

Sloan_03_0K_LED-Modules_23C

1. All dimensions are in millimetres
2. Length tolerance ±1%
3. All strandet wires cross section 0.2mm² AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**