














## A0-Series 19.0 x 19.0mm

High bright (LED type 2835)

### Specifications


Dimensions	19.0 x 19.0 mm (W x H)
Voltage	24V
Current	~1A/m
Wattage	23W/m
Brightness	~ 1400lm/m
Number of LED's	112pcs/m
Operating Temperature	-20°~+40°C
Storage Temperature	-40°~+80°C
Viewing Angle	~110°
CE	
RoHS compliant	



Further technical information in „Profile Specifications“													
Profile Type	Colour of Profile	Length of Profile (incl. end-caps)	Cover	Cable Input	Cable Output	Cable Length	Connector	Mounting Clip	Lightsource	Voltage			
<b>A0</b>	1 natural anodized <small>other colours on request</small>	<b>027</b> 270mm*	1 white diffused	1 lateral cable input 	1 lateral cable output 	<b>050</b> 50cm <small>other length on request</small>	0 without connector (wire leads) 	0 without clips 	<b>N01</b>  warm-white 2800-3500K	<b>D</b> 24VDC			
		<b>039</b> 390mm*	2 clear								1 with DC-Jack  input  output	1 with clips  2 clips per unit	<b>S01</b>  natural-white 3800-4500K
		<b>046</b> 460mm*											
		<b>058</b> 580mm*									2 without cable 	2 with snap-in connector  input  output	<b>W01</b>  cold-white 5500-6500K
		<b>064</b> 640mm*											
		<b>082</b> 820mm*											
		<b>089</b> 890mm*											
		<b>095</b> 950mm* <small>other length on request</small>											



Warning: Do not connect more than 3m in a row

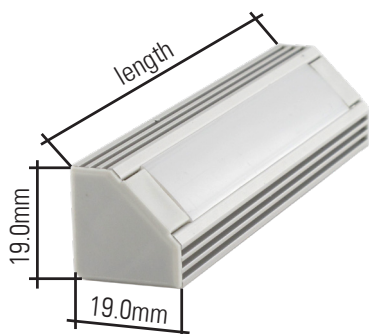

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for LED Products**