

HF-Series 22.0 x 12.2mm







High bright (LED type 2835)

Specifications

Dimensions	22.0 x 12.2mm (W x H)
Voltage	24V
Current	~1A/m
Wattage	23W/m
Brightness	~ 1400lm/m
Number of LED's	112pcs/m
Operating Temperature	-20°~+40°C
Storage Temperature	-40°~+80°C
Viewing Angle	~110°
CE	
RoHS compliant	





Further technical information in „Profile Specifications“

Profile Type	Colour of Profile	Length of Profile (incl. end-caps)	Cover	Cable Input	Cable Output	Cable Length	Connector	Mounting Clip	Lightsource	Voltage
HF	1 natural anodized <small>other colours on request</small>	029 290mm*	1 white diffused	1 lateral cable input 	1 lateral cable output 	050 50cm <small>other length on request</small>	0 without connector (wire leads) 	0 without clips	N01  warm-white 2800-3500K	D 24VDC
		041 410mm*	2 clear						S01  natural-white 3800-4500K	
		048 480mm*							W01  cold-white 5600-6500K	
		060 600mm*								
		066 660mm*								
		084 840mm*								
		091 910mm*								
		097 970mm* <small>other length on request</small>								
<small>*Tolerance: +/-2mm</small>										



Warning: Do not connect more than 3m in a row

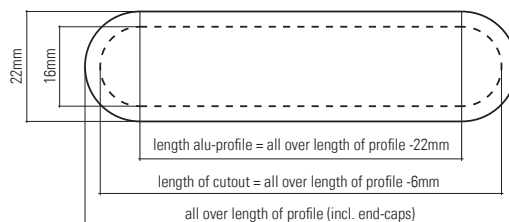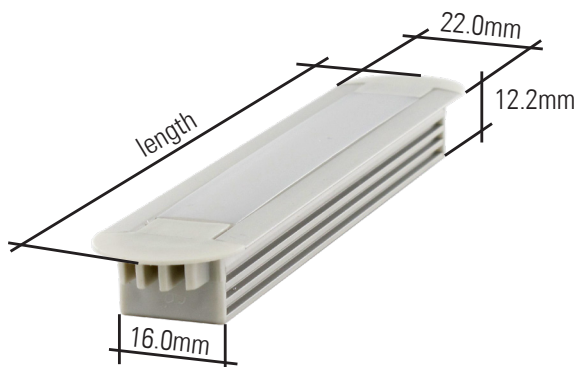

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for LED Products**