

LF-Series 22.0 x 6.0mm

High bright (LED type 2835)

Specifications

Dimensions	22.0 x 6.0 mm (W x H)
Voltage	24V
Current	~1A/m
Wattage	23W/m
Brightness	~ 1400lm/m
Number of LED's	112pcs/m
Operating Temperature	-20°~+40°C
Storage Temperature	-40°~+80°C
Viewing Angle	~110°
CE	
RoHS compliant	





Further technical information in „Profile Specifications“

Profile Type	Colour of Profile	Length of Profile (incl. end-caps)	Cover	Cable Input	Cable Output	Cable Length	Connector	Mounting Clip	Lightsource	Voltage	
LF	1 natural anodized other colours on request	029 290mm*	1 white diffused	1 lateral cable input 	1 lateral cable output 	050 50cm other length on request	0 without connector (wire leads)	0 without clips	N01 warm-white 2800-3500K	D 24VDC	
		041 410mm*	2 clear				1 with DC-Jack 				S01 natural-white 3800-4500K
		048 480mm*					2 without cable 				W01 cold-white 5500-6500K
		060 600mm*					2 with snap-in connector 				
		066 660mm*									
		084 840mm*									
		091 910mm*									
		097 970mm* other length on request									
		*Tolerance: +/-2mm									



Warning: Do not connect more than 3m in a row

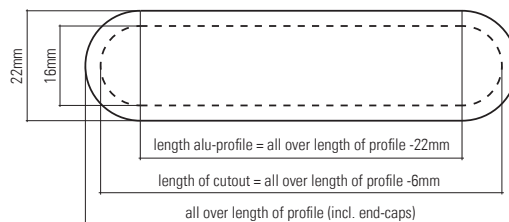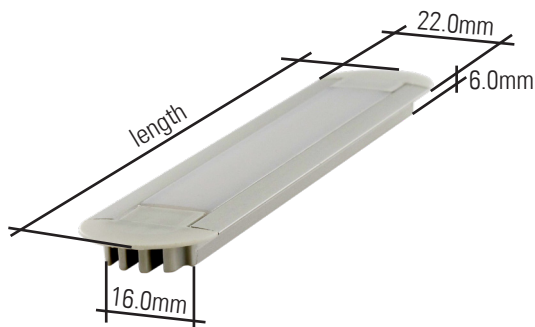

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for LED Products**